Enclosed Tray Delivery Cart - Economy

D Series - Side Loaded

1-800-522-3973

Specifications

- Stainless steel is nickel-bearing, 200 series minimum. This material is NSF recognized for corrosion resistance.
- 18 gauge stainless steel body and doors.
- .063 aluminum tray slides.
- Ledges are 2" wide.
- 18 gauge top; 16 gauge bottom on double door and 14 gauge bottom on single door.
- Double pan door with 1" rigid fiberglass insulation for sound deadening.
- Door mounted on stainless steel lift off hinges which allow 270 degree door swing.
- Stainless steel flush mount paddle latch.
- Corner bumpers.
- Vent louvers in cart sides and back.
- Drain hole pattern.
- 6" diameter cushion casters (two swivel with manual brakes, two rigid casters without brakes) on two door models.

NSF

Options

- 8" diameter casters.
- Please contact our facility at 615-895-5333 with inquiries for custom tray sizes, capacities, and ledge spacing.

Customization is available

Dimensions - Examples of Previous Models

Model	Tray Capacity		Ledge Spacing	# of Interior Compart-ments	Overall Size			Casters		Shipping Weight	Case Cube
					W	D	H	Type	Dia.	lbs.	Cu. ft.
D18TC1418E D18TC1520E	18	14"x18" 15"x20"	5"	1	26 5/8"	36 3/4"	54 5/8"	2 swivel, 2 fixed	6"	255	37.6
D20TC1418E D20TC1520E	20	14"x18" 15"x20"	5"	1	26 5/8"	36 3/4"	59 5/8"	2 swivel, 2 fixed	6"	275	40.8
D24TC1418E D24TC1520E	24	14"x18" 15"x20"	5"	2	52 1/4"	35 1/8"	41"	2 swivel, 2 fixed	6"	350	50.9
D28TC1418E D28TC1520E	28	14"x18" 15"x20"	5"	2	52 1/4"	35 1/8"	46"	2 swivel, 2 fixed	6"	375	57.8
D32TC1418E D32TC1520E	32	14"x18" 15"x20"	5"	2	52 1/4"	35 1/8"	51"	2 swivel,	6"	400	63.6

								2 fixed			

Drawings

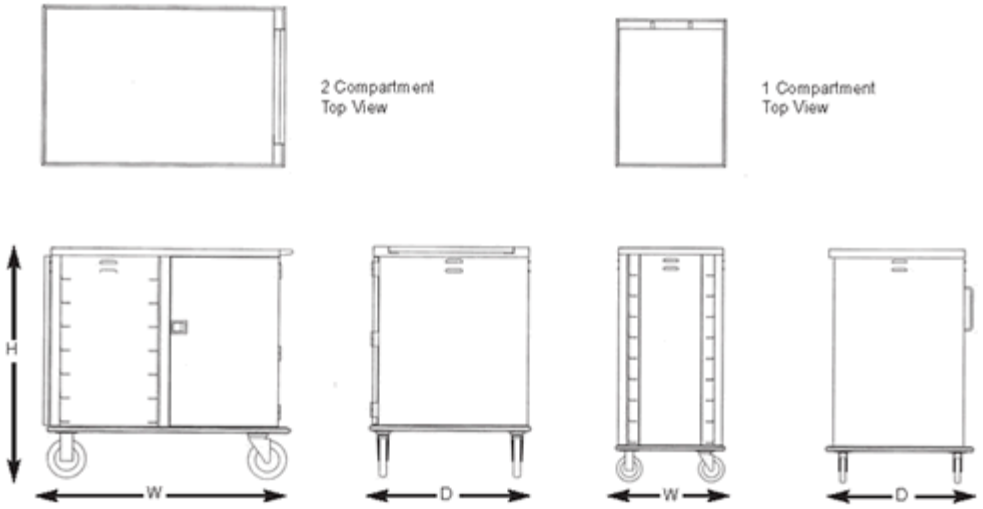

© 2011 Alliance Products, LLC
820 Esther Lane | Murfreesboro, TN 37129
1.800.522.3973 toll free
615.895.5333 phone
615.895.5334 fax